




1" TWEETER

PMK 25/120RK

1.6253.01

- Coated textile diaphragm
- Voice coil cooled in magnetic fluid
- Black polyamid front plate
- Replacable voice-coil

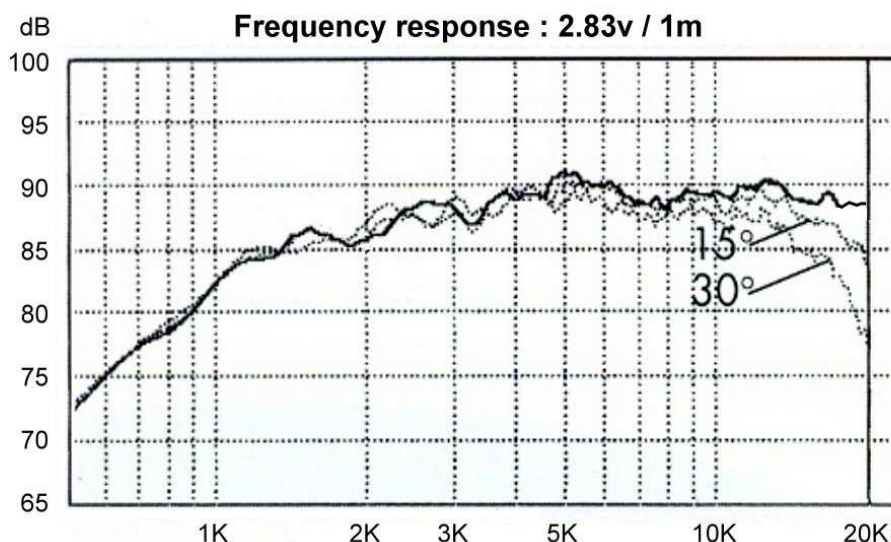

TECHNICAL DATA

Primary Application

Impedance	Z	8	Ohm
DC Resistance	R _{dc}	6,4	Ohm
Resonant Frequency	f _r	1200	Hz
Rated Power	P	90	W

Parameter

Sound Pressure	2.83v/1m	89	dB SPL
Total Moving Mass (including air mass)	M _{ms}	0,22	g
Effective Piston Area	S _p	6,8	cm ²
Mass of Speaker	M	0,27	kg

Voice Coil

Voice Coil Diameter	Ø	25	mm
Voice Coil Former		Aluminium	
Voice Coil Length	h	1,5	mm
Voice Coil Layers	n	2	

Magnet

Flux Density	B	1,2	T
Force factor	Bl	2,15	Tm
Gap Height	h	2,5	mm
Magnet Diameter	Ø	60	mm
Magnet Height	h	10	mm
Magnet Weight	M	0,1	kg

